

# Total Hydrocarbon Analyser FID

Portable **Flame-Ionisation-Detector**  
**iFiD Mobile for continuous monitoring**

**Certification according EN 15267-4**  
**QAL 1 and MCerts**



## iFiD Mobile

### Description

The **iFiD Mobile** Flame-Ionisation-Detector (FID) measures the Total Hydrocarbon concentration in industrial and laboratory environment. Because of its light weight and compact dimensions, it is especially made for daily changing measuring points or short-time measurements.


### Special Advantages

- User-friendly Touchpanel 7" TFT
- Graphic Display of HC-concentration
- Single Range – no switch between ranges
- Heated integrated Samplegasfilter 300°C
- Internal Datalogging by USB Stick
- Built in Zero gas generator (option)
- Internal Response factor correction

### Applications

- Emission monitoring
- Indoor VOC control
- Waste plants and process control
- Automotive applications

### Operation principle

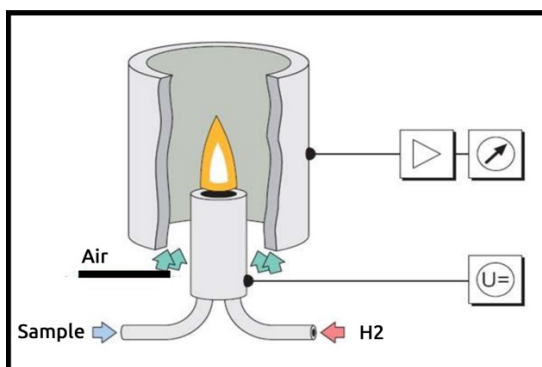

### System Performance

Measuring component:	$C_xH_y$
Operation:	7" TFT – Touch
Display:	ppmC <sub>3</sub> or ppm C <sub>1</sub> mgC/m <sup>3</sup>
Measuring range:	0 - 30.000 ppmC <sup>1</sup>
Repeatability:	± 1 % of Range
Zero drift:	± 1 % in 24 h
Response time:	1 Sec. (T <sub>90</sub> )
Warm-up time:	15 minutes
Analogue Output:	0-20mA ; 0-10V
Digital Output:	Ethernet - RS232
Datastorage:	USB Stick
Remote control:	VNC; over tablet
<b>Gas Requirements:</b>	
• Fuel	H <sub>2</sub> 5.0 or He/H <sub>2</sub>
• Span gas:	C <sub>3</sub> H <sub>8</sub>
• Zero gas:	N <sub>2</sub> or synthetic air
• Combustion air:	over built in cat
Fuel consumption:	30 ml/min
Zero / Spangas:	1 l/min
Flowcontrol:	integrated
Pressure Compensation:	-150hPa +500hPa
Power supply:	100 V ... 240 V
Frequency:	50 Hz.... 60 Hz
Power consumption:	350 W
Ambient temperature:	0°C ... +45°C
Protection class:	IP42
Dimensions (H x W x D):	178x370x420mm
Weight:	12 kg